

 免费电子书

学习

aem

Free unaffiliated eBook created from  
**Stack Overflow contributors.**

#aem

.....	1
<b>1: aem</b> .....	<b>2</b>
.....	2
Examples.....	2
.....	2
.....	2
.....	2
.....	2
.....	2
<b>Application Server</b> .....	<b>3</b>
.....	3
<b>2: AEM</b> .....	<b>4</b>
.....	4
Examples.....	4
CentOS 7AEM 6.x.....	4
.....	4
.....	4
<b>STARTRESTARTSTOP AEM</b> .....	<b>5</b>
.....	5
<b>3:</b> .....	<b>7</b>
Examples.....	7
JCR.....	7
.....	7
.....	9

---

You can share this PDF with anyone you feel could benefit from it, downloaded the latest version from: [aem](#)

It is an unofficial and free aem ebook created for educational purposes. All the content is extracted from [Stack Overflow Documentation](#), which is written by many hardworking individuals at Stack Overflow. It is neither affiliated with Stack Overflow nor official aem.

The content is released under Creative Commons BY-SA, and the list of contributors to each chapter are provided in the credits section at the end of this book. Images may be copyright of their respective owners unless otherwise specified. All trademarks and registered trademarks are the property of their respective company owners.

Use the content presented in this book at your own risk; it is not guaranteed to be correct nor accurate, please send your feedback and corrections to [info@zzzprojects.com](mailto:info@zzzprojects.com)

---

# 1: aem

Adobe Experience Manager AEM Adobe Marketing Cloud.

## Examples

AEM JAR Web JBoss WebSphere WAR.

---

AEM 6.2

- Java JRE 1.8x64
- 5GB
- 2GB RAM

---

◦ jar ◦ Adobe ◦

jar AEM ◦ 10 ◦

http://localhost:4502 ◦ user admin / pass admin ◦ ◦

4502 HTTP AEM ◦ 4502

1. 4502
2. 8080
3. 8081
4. 8082
5. 8083
6. 8084
7. 8085
8. 8888
9. 9362
- 10.

1. **-port** java -jar aem-quickstart.jar -p 6754

2. ◦

- cq
- 45 cq5-author-p4502.jar cq5-publish-p4503.jar
- -p cq5-author-p4502.jar cq5-publish-p6754.jar

AEM ◦

1. **slings.properties** - <cq-installation-dir>/crx-quickstart/conf/slings.properties  
slings.run.modes
2. **-r - JARswitch** -r <runmode> java -jar cq-publish-p6754.jar -r publish
- 3.

**-D** -Dsling.run.modes=test,publish,production

**4. JAR** -authorpublishcq5-<run-mode>-p<port-number>.jar cq-publish-p6754.jar

---

# Application Server

AEM Tomcat JBoss Websphere Adobe war

WEB-INF/web.xml sling.run.modes

aem <https://riptutorial.com/zh-CN/aem/topic/1624/aem>

## 2: AEM

LinuxAEM。

### Examples

#### CentOS 7AEM 6.x.

1. AEM ◦ /mnt / crx
2. AEM `java -jar cq-quickstart-author-p4502.jar ◦ /mnt / crx / crx-quickstart / bin ◦`
3. ◦ aem

1. root
2. • AEM

```
#!/bin/bash
#
# /etc/rc.d/init.d/aem6
#
#
# # of the file to the end of the tags section must begin with a #
# character. After the tags section, there should be a blank line.
# This keeps normal comments in the rest of the file from being
# mistaken for tags, should they happen to fit the pattern.>
#
# chkconfig: 35 85 15
# description: This service manages the Adobe Experience Manager java process.
# processname: aem6
# pidfile: /crx-quickstart/conf/cq.pid

# Source function library.
. /etc/rc.d/init.d/functions

SCRIPT_NAME=`basename $0`
AEM_ROOT=/opt/aem6
AEM_USER=aem

#####
BIN=${AEM_ROOT}/crx-quickstart/bin
START=${BIN}/start
STOP=${BIN}/stop
STATUS="${BIN}/status"

case "$1" in
start)
echo -n "Starting AEM services: "
su - ${AEM_USER} ${START}
touch /var/lock/subsys/${SCRIPT_NAME}
;;
stop)
echo -n "Shutting down AEM services: "
su - ${AEM_USER} ${STOP}
rm -f /var/lock/subsys/${SCRIPT_NAME}
;;
```

```

status)
su - ${AEM_USER} ${STATUS}
;;
restart)
su - ${AEM_USER} ${STOP}
su - ${AEM_USER} ${START}
;;
reload)
;;
*)
echo "Usage: $SCRIPT_NAME {start|stop|status|reload}"
exit 1
;;
esac

```

- **aem.service**

```

[Unit]
Description=Adobe Experience Manager

[Service]
Type=simple
ExecStart=/usr/bin/aem start
ExecStop=/usr/bin/aem stop
ExecReload=/usr/bin/aem restart
RemainAfterExit=yes

[Install]
WantedBy=multi-user.target

```

### 3. aem

- **AEM\_ROOT** /mnt/crx/mnt/crx/crx-quickstart
- **AEM\_USER** aem

### 4. SCP

- aem/usr/bin/aem
  - \$ scp <filename> user@1.1.1.1:/usr/bin/aem
- aem.service/etc/system.d/system/aem.system
  - \$ scp <filename> user@1.1.1.1:/etc/system.d/system/aem.system

### 5. SSH

- ssh user@1.1.1.1

### 6.

- sudo chmod u+rwx /usr/bin/aem
- sudo chmod u+rwx /etc/system.d/system/aem.system

### 7.

- cd /etc/system.d/system
- systemctl enable aem.system

### 8. AEM。 2。

## STARTRESTARTSTOP AEM

1. AEM - sudo service aem start
2. AEM - sudo service aem restart
3. AEM - sudo service aem stop

### 1. CentOS 7

2. AEM 6.3。 AEM 6.x.






# 3:

## Examples


### JCR

Chrome ...

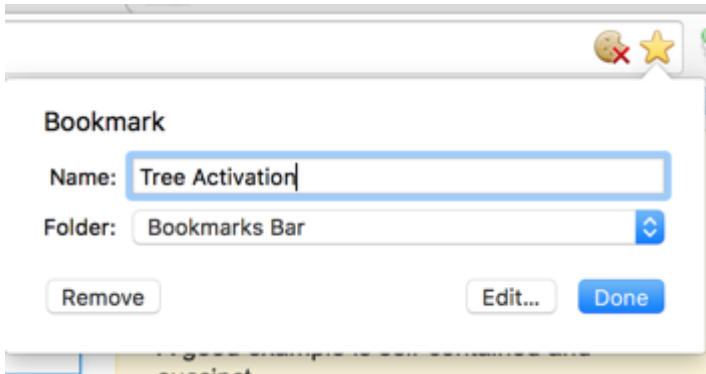

### URL

```
javascript:(function(){var root=(window.location.pathname+window.location.hash).replace(/.html.*$/, '').replace('cf#/', '').replace name="ta" target="_blank" action="/etc/replication/treeactivation.html" method="POST"><input type="hidden" name="_charset_" value="UTF-8"><input type="hidden" id="path" name="path" value="'+root+' "></form>');}document.forms.ta.submit();})();
```

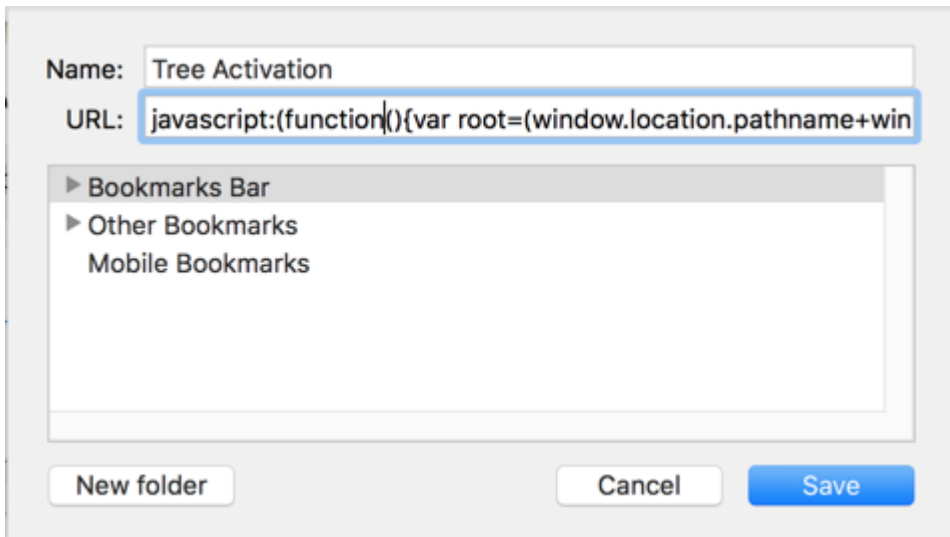

>>Cmd + Shift + B / Ctr + Shift + B.

1. AEM.
2. . .

siteadminURL[http:// localhost4502 / siteadmin/ content / geometrix-outdoors / en](http://localhost4502/siteadmin/content/geometrix-outdoors/en)

PS/bookmarklet<http://subsimple.com/bookmarklets/jsbuilder.htm>“ ”。

<https://riptutorial.com/zh-CN/aem/topic/6105/>

---

S. No		Contributors
1	aem	<a href="#">Community</a> , <a href="#">DFenstermacher</a> , <a href="#">khakiout</a> , <a href="#">santiagozky</a>
2	AEM	<a href="#">Suren Konathala</a>
3		<a href="#">ccpizza</a>