



무료 전자 책

배우기

applescript

Free unaffiliated eBook created from
Stack Overflow contributors.

#applescript

.....	1
1: AppleScript	2
.....	2
.....	2
Examples.....	2
AppleScript.....	2
:	3
.....	3
2: Applescript If	5
.....	5
Examples.....	5
= 2	5
var1 = 4 else	5
.....	5
3: AppleScript	6
Examples.....	6
.....	6
4: AppleScript	7
.....	7
Examples.....	7
URL	7
.....	7
.....	7
5: AppleScript	8
.....	8
.....	8
Examples.....	8
.....	8
6:	9
.....	9
.....	9

Examples.....	9
.....	9
.....	9
7: AppleScript.....	11
.....	11
Examples.....	11
Safari Google URL	11
Safari Google	11
AppleScript	11
.....	12

You can share this PDF with anyone you feel could benefit from it, downloaded the latest version from: [applescript](#)

It is an unofficial and free applescript ebook created for educational purposes. All the content is extracted from [Stack Overflow Documentation](#), which is written by many hardworking individuals at Stack Overflow. It is neither affiliated with Stack Overflow nor official applescript.

The content is released under Creative Commons BY-SA, and the list of contributors to each chapter are provided in the credits section at the end of this book. Images may be copyright of their respective owners unless otherwise specified. All trademarks and registered trademarks are the property of their respective company owners.

Use the content presented in this book at your own risk; it is not guaranteed to be correct nor accurate, please send your feedback and corrections to info@zzzprojects.com

1: AppleScript

AppleScript 1993 Mac Mac. AppleScript Mac .

Mac macOS . .

"" .

	OS	
1.6	10.0	2001-03-24
1.7	10.1	2001-09-25
1.9	10.2	2002-08-23
1.9.2	10.3	2003-10-24
1.10	10.4	2005-04-29
2.0	10.5	2007-10-26
2.1	10.6	2009-08-28
2.2	10.7	2011 7 20
2.2.4	10.8	2012-07-25
2.3	10.9	2013-10-22
2.4	10.10	2014-10-16
2.5	10.11	2015-06-08

Examples

AppleScript

1. .

2.1 2.4

Mac OS X Leopard OS X Yosemite Script Editor

```
/Applications/Utilities/Script Editor.app
```

2.1 2.4

Mac OS X Snow Leopard OS X Mavericks AppleScript .

```
/Applications/Utilities/AppleScript Editor.app
```

2. .


```
display dialog "Hello World"
```

3. .



: ().

4. "Hello World" .

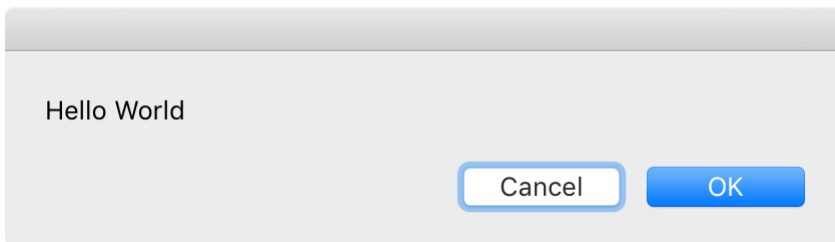

!


:

```
display dialog . AppleScript . display dialog AppleScript .
```

```
" " .
```

AppleScript Mac . . .

Script Editor >

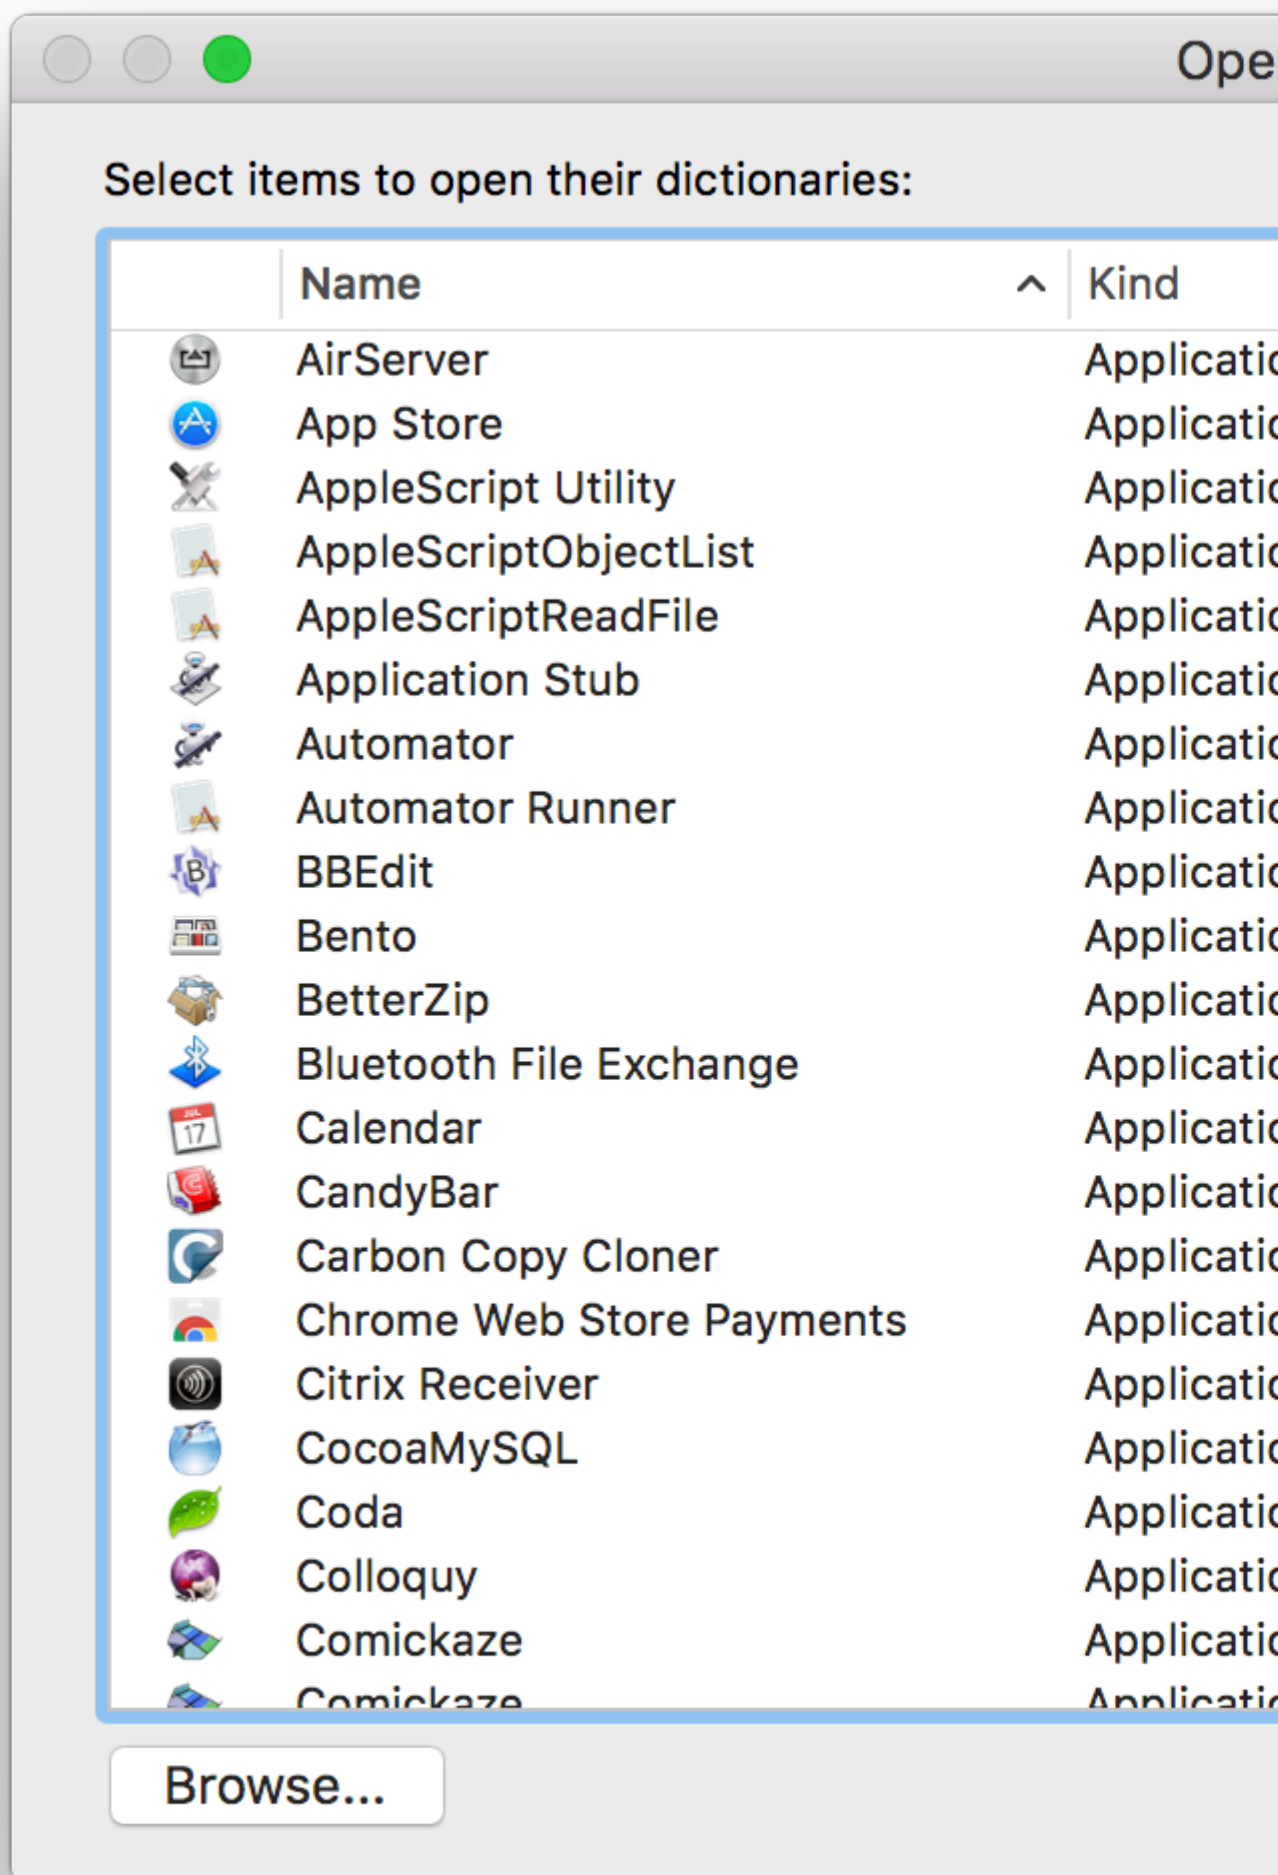

2: Applescript If

if else .

Examples

= 2

```
set var to 2

if var = 2 then
    say "Var equals 2"
end if
```

var1 = 4 else

```
set var1 to 5
//set the number to anything

if var1 = 5 then
    say "Var one equals 5"
else
    say "Var one does not equal 5"
end if
```

```
display dialog "Password" default answer ""
set w to text returned of the result
if w = "Password" then
    display notification "Correct"
end if
```

Applescript If : <https://riptutorial.com/ko/applescript/topic/9977/applescript-if---->

3: AppleScript

Examples

```
set number1 to 8
```

AppleScript : <https://riptutorial.com/ko/applescript/topic/9975/applescript-->

4: AppleScript

AppleScript URL .

Examples

URL

Safari URL URL of current tab .

```
tell application "Safari"
    return URL of current tab of window 1
end tell
```

Chrome URL URL of active tab URL of active tab .

```
tell application "Google Chrome"
    return URL of active tab of window 1
end tell
```

AppleScript : <https://riptutorial.com/ko/applescript/topic/9030/applescript--->

5: AppleScript


- [] [] [] [/] [/] [/ / / /] []
- [] [/ /] [/] [/] []
- [] [] []
- [] [] [] [invisibles] [] []
- [] [] [invisibles] [] []
- [] [] [/] [] [] [] [/]
- **URL** [/FTP/ / / / /] [URL]
- [RGB]

AppleScript . Script Editor StandardAdditions.sdef .

Examples


AppleScript . . .

```
display dialog "Hello World"
display alert "Hello World"
```

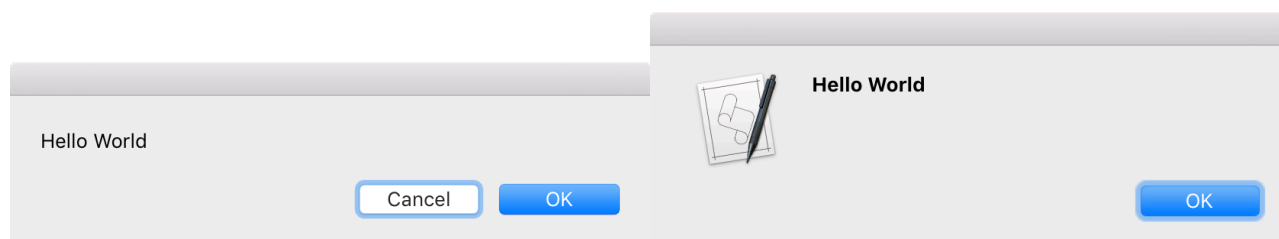

buttons . . .

```
display dialog "Hello World" buttons {"button one", "button two", "button three"}
```

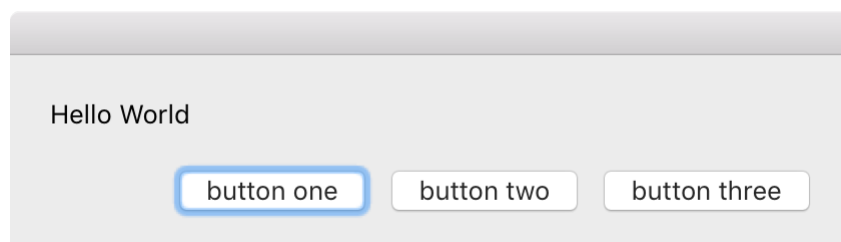


```
{button returned:"button one"}
```

AppleScript : <https://riptutorial.com/ko/applescript/topic/6546/applescript--->

6:

- [] []



Examples

```
try on error . try on error . on error end try .
```

```
foo . .
```

```
try
  foo
on error
  display dialog "An error occurred"
end try
```

```
on error errmsg number errorno errmsg errorno .
```

```
try
  foo
on error errmsg number errorno
  display dialog errmsg & errorno
end try
```

```
foo .-2753
```

```
error . catch . "." -2700.
```

```
error
```

```
 "." «» -2700
```

```
.
```

```
error "testing errors"
```

```
«» -2700 " "
```

```
number .
```

```
error "testing errors" number -1
```

«» " " -1

X .

```
error number -1
```

" -1 ." «» -1 -1

.

```
error number -42
```

«» " " .

: <https://riptutorial.com/ko/applescript/topic/5404/>

7: AppleScript

Applescript .

.

Examples

Safari Google URL

Safari URL

```
osascript -e 'tell app "safari" to get the url of the current tab of window 1'
```

Google URL

```
osascript -e 'tell app "google chrome" to get the url of the active tab of window 1'
```

Safari Google

Safari

```
osascript -e 'tell app "safari" to get the name of the current tab of window 1'
```

Google

```
osascript -e 'tell app "google chrome" to get the title of the active tab of window 1'
```

AppleScript

AppleScript . .

```
#!/bin/bash

pageinfo() {
  osascript -e \
'tell app "safari"
  tell the current tab of window 1
    return {url & "\n" & name}
  end tell
end tell'
}
```

AppleScript : <https://riptutorial.com/ko/applescript/topic/10886/---applescript>

S. No		Contributors
1	AppleScript	Community , Dov , grgarside , Pro Blaster
2	Applescript If	SuperTech
3	AppleScript	SuperTech
4	AppleScript	grgarside , IT Master
5	AppleScript	grgarside
6		dj bazzie wazzie , grgarside
7	AppleScript	IO_ol